



Smart Home



TUYA Smart home hos'

H6 BGM host

Voice control

Quick installation




Smart door lock



T801-1 Smart door lock



Home

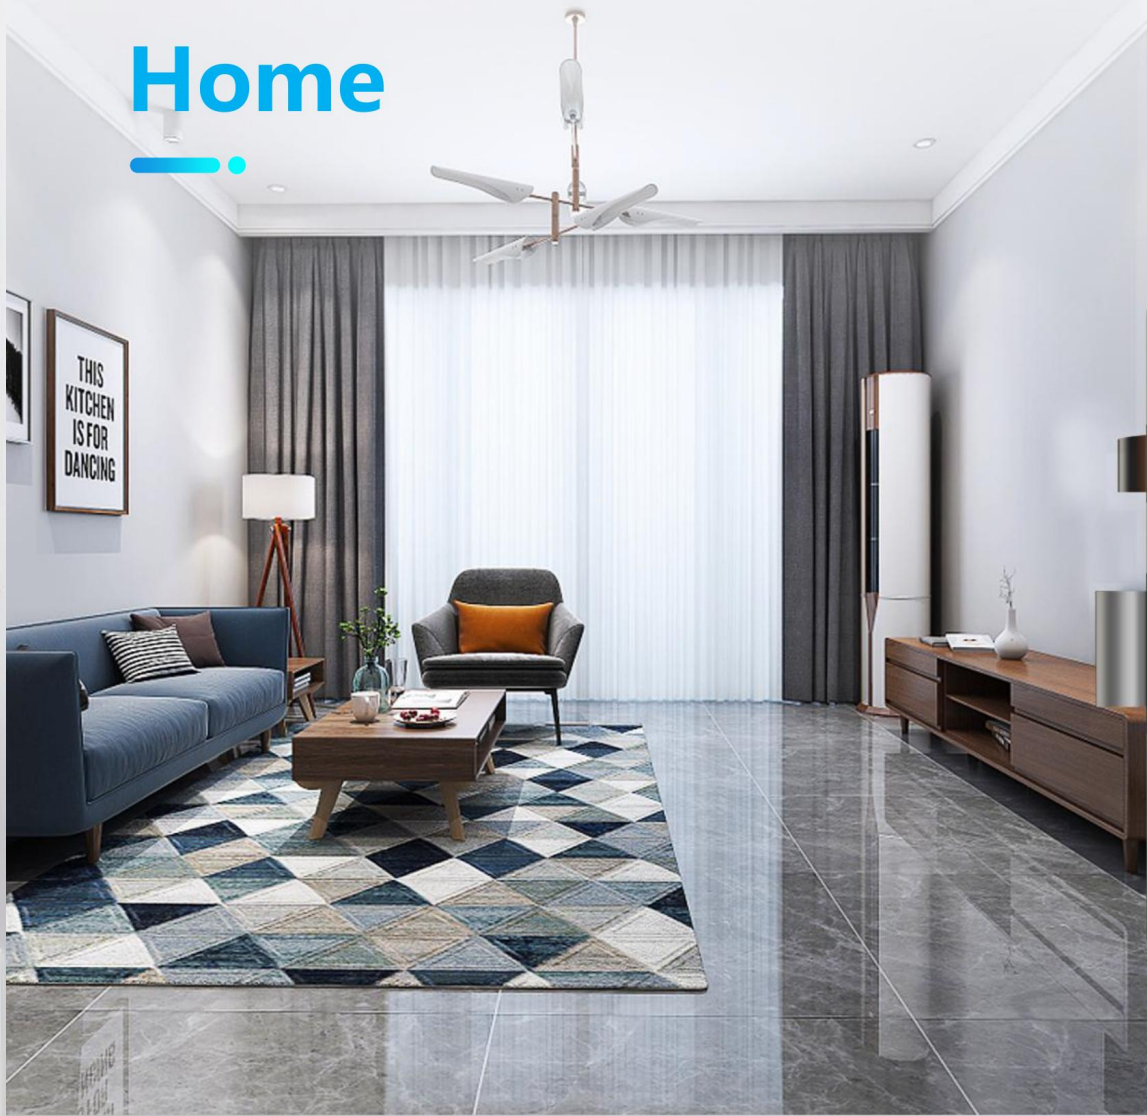

Human Presence Sensor & Light Sensor ,2in1



1. Built-in 24GHz microwave radar module and infrared module;
2. Built-in light sensor;
3. Built-in Wifi 2.4G module;
4. The delay time triggered by the unmanned state can be flexibly set from the APP, (0-600S);



Human Presence Sensor & Light Sensor ,2in1

H62S US press button switch



One gang switch

H62S US press button switch

- 1.ABS flame retardant material
- 2.big board key design
- 3.TOZ control technology, 1 million contact life
- 4.Certificate: CE, RoHS
- 5.Input: 100-240V~ 50/60Hz
- 6.Output: 600W/gang
- 7.Wireless protocol(WiFi or Zigbee): IEEE 802.11 b/g/n,2.4GHz
Zigbee3.0 2.4GHz
- 8.Size: 120*70mm



1 gang 2 way switch



Dimmer switch



WiFi



Zigbee



Voice control




Remote Control



Timing



Quick installation

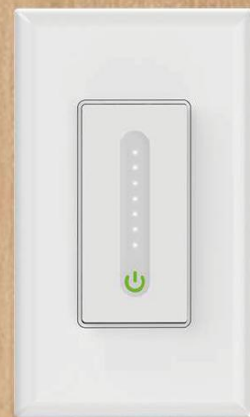

K52S US series

Touch Glass switch

H52S US series Touch Glass s

American style, US standard switch

- 1.PC flame retardant frame, tempered glass panel
- 2.TOZ control technology, 1 million contact life
- 3.Certificate: CE, RoHS
- 4.Input: 100-240V~ 50/60Hz
- 5.Output: 600W/gang
6. Wireless protocol(WiFi or Zigbee): IEEE 802.11 b/g/n,2.4GHz
Zigbee3.0 2.4GHz
- 7.Size: 120*70mm
- 8.Color:Black,White,Golden



WiFi



Zigbee



Voice control



Remote Control




Timing



Quick installation



One gang switch

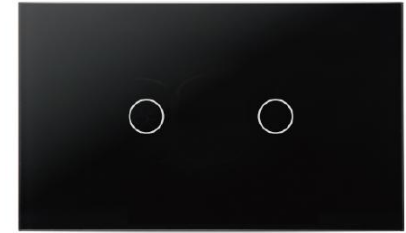

Two gang switch




Three gang switch



Four gang switch




Scene switch

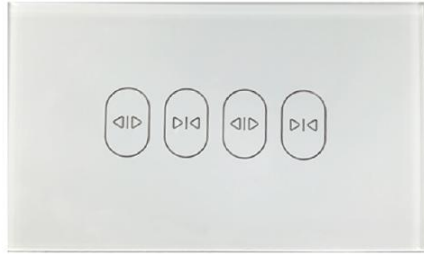

Dual-track curtain switch



Curtain switch

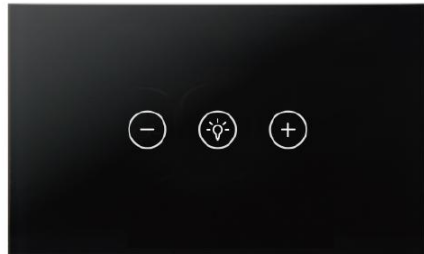

Dimmer switch





H52S US series Touch Glass switch(Non neutral switch)

American style, US standard switch

- 1.PC flame retardant frame, tempered glass panel
- 2.TOZ control technology, 1 million contact life
- 3.Certificate: CE, RoHS
- 4.Input: 100~240V~ 50/60Hz
- 5.Output: 600W/gang
6. Wireless protocol(WiFi or Zigbee) : IEEE 802.11 b/g/n, 2.4GHz
Zigbee3.0 2.4GHz
- 7.Size: 120*70mm
- 8.Color:Black,White,Golden



WiFi



Zigbee



Voice control



Remote Control



Timing



Quick installation



One gang switch



Two gang switch



Three gang switch

American style, large board buttons
Also support joint switches,
support smart home and smart hotel
Radar detection, proximity automatic sensing



H6S EU/UK series Press button switch

H6S EU/UK series Press butto

Also support joint switches, support smart home and smart hotel
Radar detection, proximity automatic sensing

- 1.ABS flame retardant material
- 2.Big board key design
- 3.TOZ control technology, 1 million contact life
- 4.Certificate: CE, RoHS
- 5.Input: 100-240V~ 50/60Hz
- 6.Output: 600W/gang
- 7.Wireless protocol(WiFi or Zigbee): IEEE 802.11 b/g/n,2.4GHz
Zigbee3.0 2.4GHz
- 8.Size: 86*86*41mm
- 9.Color: grey, gold, black



WiFi



Zigbee



Voice control




Remote Control



Timing



Quick installation

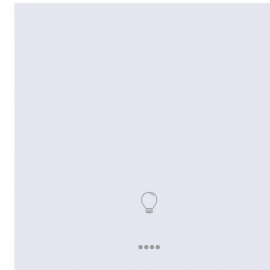

One gang switch




Two gang switch



Three gang switch



Four gang switch

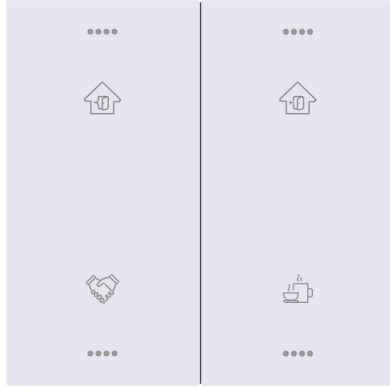

Scene switch



Curtain switch



Dual-track curtain switch





H6S EU/UK series Press Butto

Also support joint switches, support smart home and smart hotel
Radar detection, proximity automatic sensing

- 1.ABS flame retardant material
- 2.Big board key design
- 3.1 million contact life
- 4.Certificate: CE, RoHS
- 5.Input: 100-240V~ 50/60Hz
- 6.Output: 200W/gang
- 7.Wireless protocol(WiFi or Zigbee): IEEE 802.11 b/g/n,2.4GHz
Zigbee3.0 2.4GHz
- 8.Size: 86*86*41mm
- 9.Color: grey, gold, black



WiFi



Zigbee



Voice control




Remote Control




Timing



Quick installation



One gang switch



Two gang switch



Three gang switch

K5S EU/UK series

Touch Glass switch

K5S EU/UK series Touch Glass

Simple design, cheapest

Sensitive touch with audible feedback

Suitable for house terse style decoration or project

1, PC flame retardant frame, tempered glass panel

2, Touch glass panel switch

3, TOZ control technology, 1 million contact life

4, Certificate: CE, RoHS

5, Input: 100-240V~ 50/60Hz

6, Output: 600W/gang

7, Wireless protocol (WiFi or Zigbee): IEEE 802.11 b/g/n, 2.4GHz

Zigbee 3.0 2.4GHz

8, Size: 86*86*41mm

9, Color: Black, White, Golden



WiFi



Zigbee



Voice control




Remote Control




Timing




Quick installation



One gang switch



Two gang switch

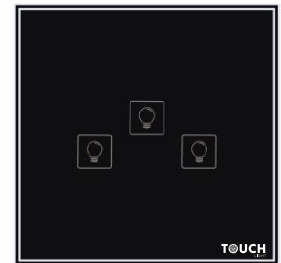


Three gang switch




Four gang switch



Scene switch

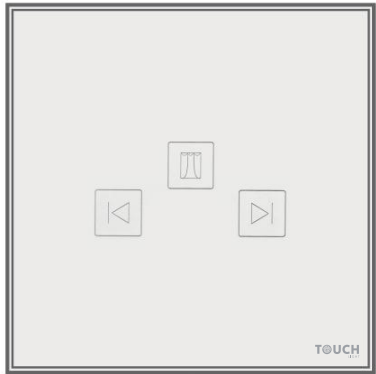

Curtain switch

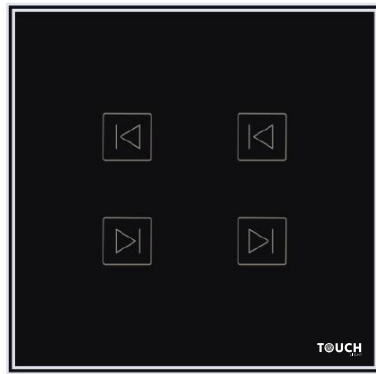

Dual-track curtain switch





K5S EU/UK series Touch Glass

Simple design, cheapest

Sensitive touch with audible feedback

Suitable for house terse style decoration or project

1, PC flame retardant frame, tempered glass panel

2.Touch glass panel switch

3, TOZ control technology, 1 million contact life

4, Certificate: CE, RoHS

5, Input: 100-240V~ 50/60Hz

6, Output: 200W/gang

7.Wireless protocol(WiFi or Zigbee) : IEEE 802.11 b/g/n,2.4GHz

Zigbee3.0 2.4GHz

8, Size: 86*86*41mm

9.Color: Black,White,Golden



WiFi



Zigbee



Voice control




Remote Control




Timing




Quick installation

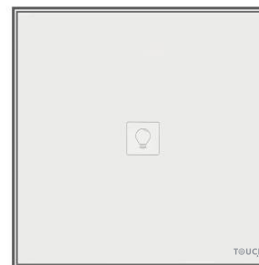

One gang switch

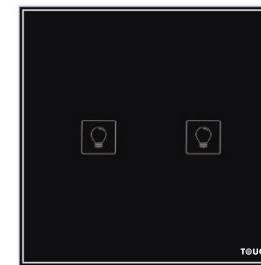

Two gang switch

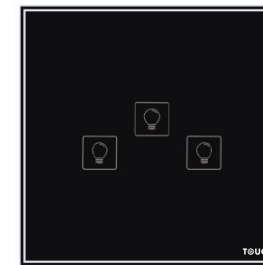

Three gang switch

M6S EU/UK series

Touch Glass switch

M6S EU/UK series Touch Glas

CNC aluminum frame, 2.5D tempered glass panel

Smooth ultra-thin body

Suitable for modern style decoration

1. Metal frame, tempered glass panel

2. Touch glass panel switch

3. TOZ control technology, 1 million contact life

4. Certificate: CE, RoHS

5. Input: 100-240V~ 50/60Hz

6. Output: 600W/gang

7. Wireless protocol (WiFi or Zigbee): IEEE 802.11 b/g/n, 2.4GHz

Zigbee 3.0 2.4GHz

8. Size: 86*86*41mm

9. Color: Black, White, Golden



WiFi



Zigbee



Voice control



Remote Control



Timing



Quick installation



Works With
Amazon Alexa



Works With
Google Assistant



One gang switch



Two gang switch



Three gang switch




Four gang switch



Scene switch



Curtain switch

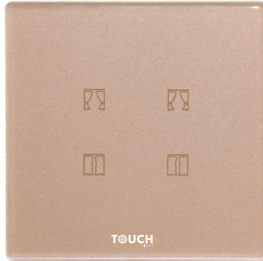

Dual-track curtain switch



Dimmer switch





M6S EU/UK series Touch Glass switch(Non neutral switch)

CNC aluminum frame, 2.5D tempered glass panel
 Smooth ultra-thin body
 Suitable for modern style decoration



WiFi



Zigbee

1. Metal frame, tempered glass panel
2. Touch glass panel switch
3. TOZ control technology, 1 million contact life
4. Certificate: CE, RoHS
5. Input: 100-240V~ 50/60Hz
6. Output: 200W/gang
7. Wireless protocol(WiFi or Zigbee): IEEE 802.11 b/g/n,2.4GHz
 Zigbee3.0 2.4GHz
8. Size: 86*86*41mm
9. Color: Black,White,Golden



Voice control



Remote Control



Timing



Quick installation



Works With
Amazon Alexa



Works With
Google Assistant



One gang switch



Two gang switch



Three gang switch

RGB series

LED A19 9W RGBCW EU/US

Lamp model: A19

Bead type: W-2835

Color: RGBCW

Color temperature: 2000-5000K(US), 3000-6000K(EU) (adjustable cold and warm colors)

Light intensity: 800LM@5000K, RGB 70/300/70

Product power: 9W

Input voltage: AC120V(US), AC220(EU)

Input frequency: 60Hz WIFI standard: 60Hz

WIFI frequency: 802.11b /g/n

Meet certification criteria: ETL/FCC ID

Lamp cap technology: environment-friendly nickel plating

Uses: home, restaurant, hotel, etc

Shell: Plastic

Inner shell, aluminum

Main: PCB

Lamp panel: aluminum base panel



WiFi



Bluetooth



Timing



Voice control



Remote Control



Safety & Durability





C37 Candle Light RGBCW 4W

Model: C37

Color: RGBCW

Light intensity: 320lum

Input current: $\leq 500\text{mA}$

Input voltage: AC100V-240V

WiFi standard: WiFi 802.11b /g/n

WiFi frequency: 2.4GHz

Lamp cap technology: environment-friendly nickel plating

Uses: home, restaurant, hotel, etc

Quality and packaging requirements: standard industrial packaging. The packing is strong, anti-static, moisture-proof, shock-proof and corrosion-proof, in line with the safety requirements of packaging and transportation of electronic parts.

Shell: Plastic

Inner shell, aluminum

Main: PCB

Lamp panel: aluminum base panel



Voice Control



16 Million Color Adjustment



Time Schedule



Device Sharing



Simple Installation



Adjustable Brightness



Safety & Durability



Remote Control





GU10 Smart light RGBCW 3.5V

Lamp cap model: GU10

Color: RGBCW

Light intensity: 320lum

Input current: $\leq 500\text{mA}$

Input voltage: AC100V-240V

WiFi standard: WiFi 802.11b /g/n

WiFi frequency: 2.4GHz

Lamp cap technology: environment-friendly nickel plating

Uses: home, restaurant, hotel, etc

Quality and packaging requirements: standard industrial packaging. The packing is strong, anti-static, moisture-proof, shock-proof and corrosion-proof, in line with the safety requirements of packaging and transportation of electronic parts.

Shell: Plastic

Inner shell, aluminum

Main: PCB

Lamp panel: aluminum base panel



WiFi



Timing



Safety & Durability



Voice control



Remote Control



BR30 Smart Bulb RGBCW 9W

Model: BR30

Color: RGBCW

Color temperature: 2700-9000K+RGB 16 million

Light intensity: 1200LM input frequency 50/60Hz

Input voltage: AC100V-240V WIFI standard: WIFI 802.11b /g/ N

WiFi frequency: 2.4GHz

Lamp cap technology: environment-friendly nickel plating

Uses: home, restaurant, hotel, etc

Quality and packaging requirements: standard industrial packaging. The packing is strong, anti-static, moisture-proof, shock-proof and corrosion-proof, in line with the safety requirements of packaging and transportation of electronic parts.

Shell: Plastic

Inner shell, aluminum

Main: PCB

Lamp panel: aluminum base panel



Voice Control



16 Million Color Adjustment



Time Schedule



Device Sharing



Simple Installation



Adjustable Brightness



Safety & Durability



Remote Control





508 Wi-Fi light strip 5m/10m

Rated voltage: 12V

Color type: RGB

Rated power: 7.2W/M

Dimensions: L5MW10MM*H2.5MM/L10MW10MM*H2.5MM

Lamp group circuit: three lamps and three resistors

Circuit board: white FPC board

board width: 10MM

Number of lamp beads: 30 lights/M

LED light source: 5050 chip

Lumens: 20 lm/W

Beam angle: 120 degrees

Waterproof grade: IP65

Control method: three-in-one black technology,music rhythm

Power supply voltage: 110-240V

Remarks: Conventional 5 meters and 10 meters,customizable



Voice Control



16 Million Color Adjustment



Remote Control



Non-volatile Memory



Time Schedule



Cutable And Linkable



Simple Installation



Group Control





Zigbee 3.0 Gateway

An intelligent network control host based on ZigBee protocol, the appearance is simple and generous, the software operation interface is friendly and humanized.

Stylish and compact

LED multiple working status indication

Support Zigbee3.0 and Buletooth5.0

Built-in omnidirectional antenna, receiving sensitivity -80Db

Color; white



Zigbee 3.0



Bluetooth 5.0



Remote Control



Quick installation



Home security Sensor



K series Home security Sensor

The products are suitable for family residence, real estate villas, factories, shopping malls, warehouses, office buildings, banks, computer rooms and other places of security prevention.

1. Built-in Zigbee module
2. APP defence & withdraw mode
3. Scenario
4. Push Alarm infos
5. PM2.5, Formaldehyde curve



Smoke sensor 3C certified



Gas sensor Ceiling type



Gas sensor Wall mounted



Audible & visual alarm



Motion sensor



Door sensor



SOS button



Temperature and humidity

Video security

Indoor camera

Sensor parts: ultra - definition 2 million pixel CMOS sensor

Clarity: 1080P ultra clear image, resolution of 1920*1080,2 million pixels.

Minimum illumination: Day mode: 1.5Lux, Night vision mode: 0lux (infrared light on).

Transmission distance: outdoor 100 meters, indoor 30 meters (depending on the environment).

Infrared lamp: 6 850mm, the maximum irradiation distance is 5 meters

Infrared range: 5 m.

Audio input: Built-in 38dB pickup.

Audio output: Built-in speaker.

CMOS performance: support automatic white balance, automatic gain control, automatic backlight compensation.

System security: account number, password, secondary user rights

ONVIF protocol: Supported.

Local storage: Supports up to 32G Micro SD card, 24 hours recording, plug and play.



Remote Control



Quick installation



WiFi



Safety & Durability



Outdoor camera



Sensor parts: ultra - definition 2 million pixel CMOS sensor

Clarity: 1080P ultra clear image, resolution of 1920*1080,2 million pixels.

Minimum illumination: Day mode: 1.5Lux, Night vision mode: 0Lux (infrared light on).

Transmission distance: outdoor 100 meters, indoor 30 meters (depending on the environment).

Audio input: Built-in 38dB pickup.

Audio output: Built-in speaker.

CMOS performance: support automatic white balance, automatic gain control, automatic backlight compensation.

System security: account number, password, secondary user rights

ONVIF protocol: Supported.

Local storage: Supports up to 32G Micro SD card, 24 hours recording, plug and play.



Remote Control



Quick installation



WiFi



Safety & Durability





Outdoor camera

Battery-powered,
Video intercom doorbell,
Standby for 180 days
140° wide Angle view
100m pixel
Low power cost
WiFi connection
Push doorbell message
Remote video unlock
Infrared night vision, two-way calling



WiFi



App view



Battery



Quick installation



Safety & Durability



IR transfer

UFO IR transfer

Thousands modes Small cute size 360 angle

1.Product specification: 10.9*10.9* 4.6cm

2.Weight: 121 g

3.Installation method: top suction installation

4.Wireless distance: open 20m

5.Adapter input voltage: AC100-240V 50Hz/60Hz

6.Material retardant ABS standby power consumption: less than 0.25W

7.Working frequency: ZigBee Service life: 1 million times

8.Wireless reception sensitivity: greater than -95dBm

9.Maximum power of wireless communication transmission: 20.5dB

Operating ambient

10.Temperature :0 ~ 70 °C ; Humidity 10% to 95%



App control



Quick installation



Safety & Durability



AC

Support 574 brands



TV

Support 1918 brands



STB

Support 2326 brands



DVD

Support global 898 brands



HIFI

Support 253 brands



Square box IR transfer

Thousands modes Small cute size 360 angle

1.Product specification: 50*50*53.4mm

2.Installation method: top suction installation

3.Wireless distance: open 20m

4.Adapter input voltage: AC100-240V 50Hz/60Hz

5.Material retardant ABS standby power consumption: less than 0.25W

6.Working frequency: ZigBee Service life: 1 million times

7.Wireless reception sensitivity: greater than -95dBm

8.Maximum power of wireless communication transmission: 20.5dB

Operating ambient

9.Temperature :0 ~ 70 C ; Humidity 10% to 95%



App control



Quick installation



Safety & Durability



AC

Support 574 brands



TV

Support 1918 brands



STB

Support 2326 brands



DVD

Support global 898 brands



HiFi

Support 253 brands



Fan coil type AC controller

Power supply voltage: 220-240VAC±10% 50Hz

Load current: < 3A

Temperature sensing element: NTC.10K

Temperature control range: 1~50 °C (factory default 16~30 °C)

Temperature control accuracy: ±1 °C

Display mode: large screen black background backlight LCD (64*64mm) white backlight

Operation mode: capacitive touch screen

Shell material: fireproof ABS+ military grade tempered glass lens

Working environment: -10~60 °C, 5~95%RH no bullying

Storage temperature: -20~70 °C

Dimensions: Operating panel 86*86*10.5mm; Power supply box of 64 * 64 * 25 mm

Installation hole spacing: 60mm (standard 86 bottom box hole spacing)

Wiring specification: 0.5-1.5mm

Applicable to: fan coil unit, water heating, air panel + heating control



App control



Multitouch controls




LCD




Temperature Display

Smart curtain system

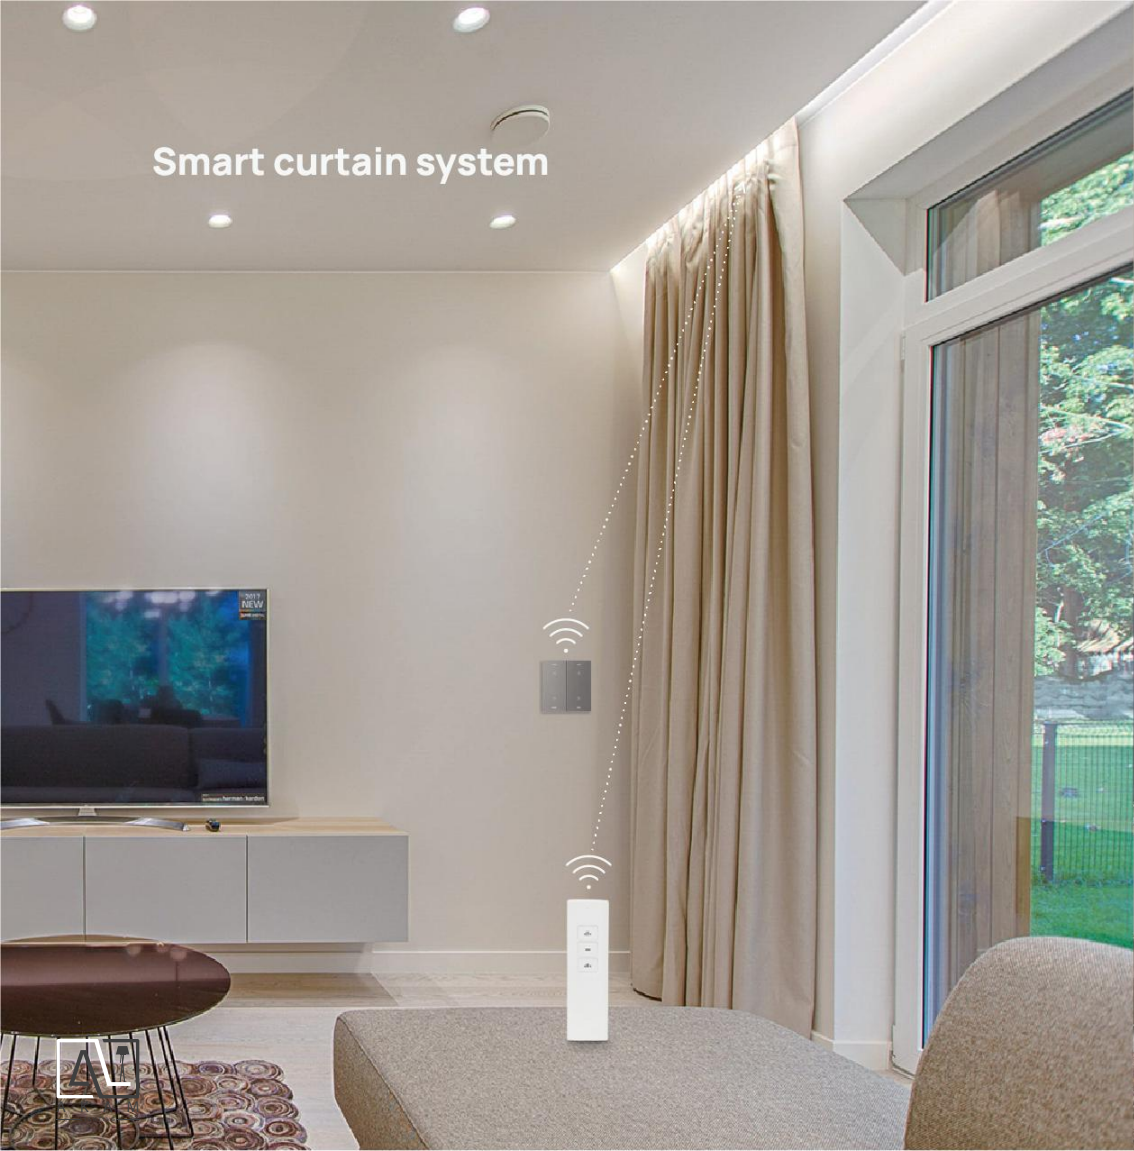

Smart window system



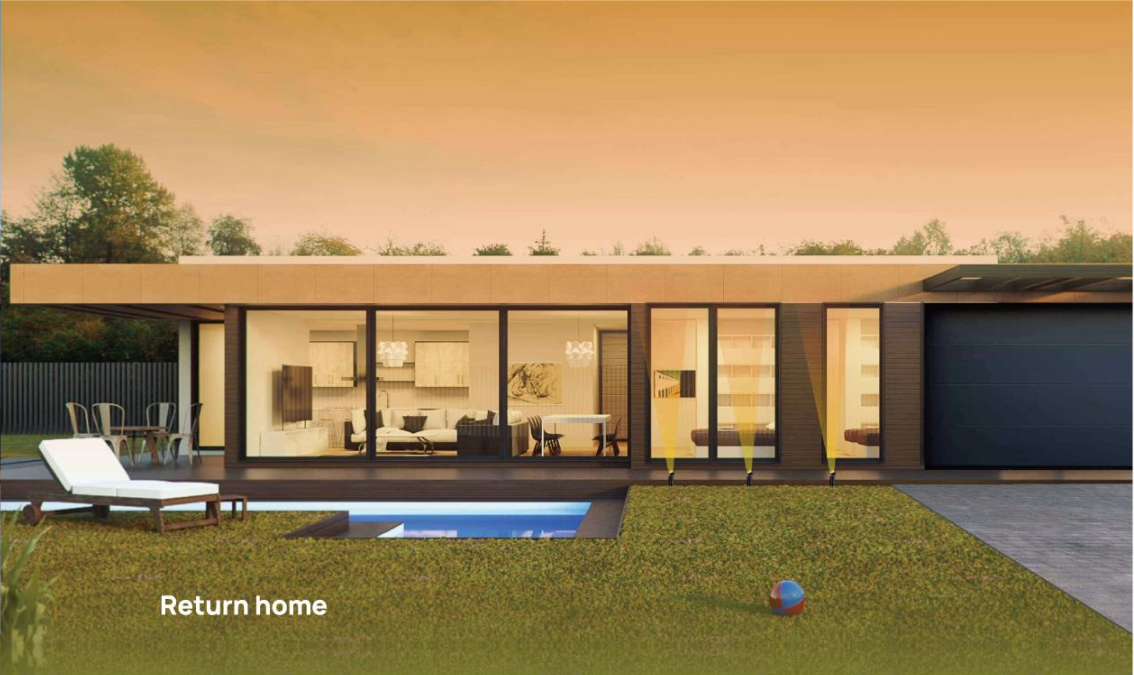

Light & curtain scene

With just one touch, the curtains can be closed slowly. You can also set the scene with the light mode, such as morning mode, lunch break mode, sleep mode, etc.



Intelligent chip a variety of cleaning modes

A variety of cleaning methods to meet the needs of different families



Automatic cleaning



key cleaning



Edge cleaning



Overall cleaning



SUCTION,

SWEEP AND DRAG

INTEGRATED SWEEPER

App Control

Automatic Recharge

Voice Control



Factory Strength

Origin of goods
OEM custom



CONTACT US

Address 1:

Street 60m , opposite of German Village, As Sulaymaniyah, Iraq.
+(964) 750 155 2912

Address 2:

Zargata, Opposite Girls Union High School, As Sulaymaniyah, Iraq.
+(964) 770 350 9001

Address 3:

Bakhtiani, Opposite Spaceton, Erbil, Iraq.
+(964) 750 888 3031 | +(964) 750 999 3031

www.akamlighting.com
info@akamlighting.com

ژماره مۆبایلی ناکام:
+(964) 770 155 2912

په یوه ندى

لقى په كه م:

سلیمانى - شهقامى بازهى مهليك مه محمود - بهرامبر گوندى ئەلمانى
+(964) 750 155 2912

لقى دووهم:

سلیمانى - زهگه ته - بهرامبر نامادهبى په كىتى كچان
+(964) 770 350 9001

لقى سێهه م:

ههولێر - دوو سايدى بهختيارى - بهرامبر سپههستوون
+(964) 750 888 3031 | +(964) 750 999 3031

www.akamlighting.com
info@akamlighting.com